

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 September 2002 (12.09.2002)

PCT

(10) International Publication Number  
**WO 02/070145 A1**

(51) International Patent Classification<sup>7</sup>: **B05C 9/02**

(21) International Application Number: PCT/AU02/00226

(22) International Filing Date: 1 March 2002 (01.03.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

PR 3474	2 March 2001 (02.03.2001)	AU
PR 3475	2 March 2001 (02.03.2001)	AU
PR 3476	2 March 2001 (02.03.2001)	AU
PR 3477	2 March 2001 (02.03.2001)	AU
PR 3478	2 March 2001 (02.03.2001)	AU

(71) Applicant (for all designated States except US): **JAMES HARDIE RESEARCH PTY LIMITED** [AU/AU];  
level 1, Research & Product Development Building, 10 Colquhoun Street, Rosehill, NSW 2142 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **COTTIER, John,**

Sydney [AU/AU]; 90B MiMi Street, Oatley, NSW 2223 (AU). **CURRAN, Chris** [AU/AU]; Unit 58, 10-12 Freeman place, Carlingford, NSW 2118 (AU). **DOW, Geoffrey** [AU/AU]; 52 Yackatoo road, Upper beaconsfield, VIC 3807 (AU).


(74) Agent: **BALDWIN SHELSTON WATERS**; 60 Margaret Street, Sydney, NSW 2000 (AU).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent

[Continued on next page]

(54) Title: SPATTERING APPARATUS

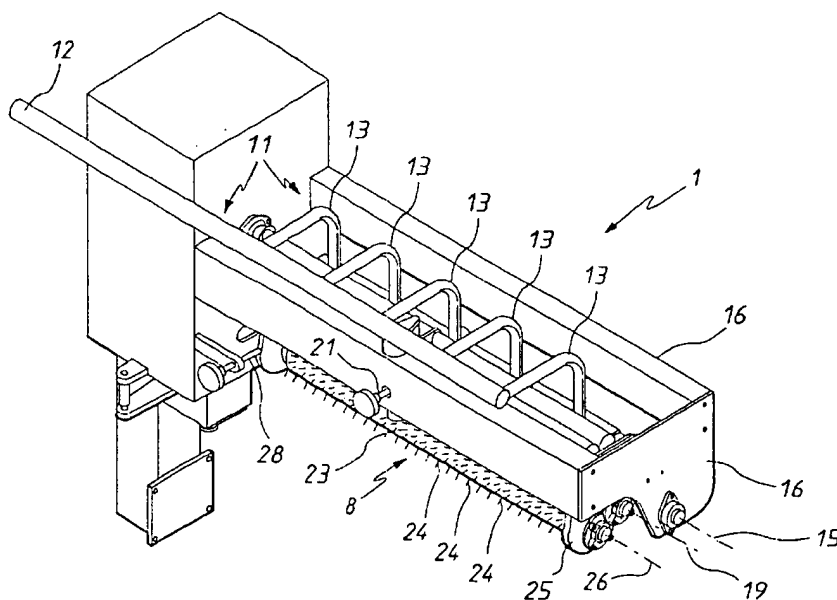

(57) Abstract: An apparatus (1) for applying a slurry to a substrate (2). The apparatus includes a delivery drum (4) incorporating a delivery surface (5) disposed to support a layer of slurry. A spattering roller (8) is positioned closely adjacent the delivery drum and is rotatable so as to spatter the slurry from the delivery surface onto the substrate. Regulation means selectively vary or interrupt vary or interrupt the flow of slurry from the delivery surface onto the substrate.

WO 02/070145 A1

WO 02/070145 A1



(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

- 1 -

**TITLE: SPATTERING APPARATUS****FIELD OF THE INVENTION**

This application claims priority from the following Australian provisional patent applications, the full contents of which are hereby incorporated by cross-reference.

Application No.	Title	Date Filed
PR3474	A Composite Product	02 March 2001
PR3475	Spattering Apparatus	02 March 2001
PR3476	Additive For Dewaterable Slurry	02 March 2001
PR3477	A Method And Apparatus For Forming A Laminated Sheet Material By A Spattering	02 March 2001
PR3478	Coatings For Building Products	02 March 2001

The present invention relates to an applicator for a fluent substance, and in the preferred form to an apparatus for applying a slurry to a substrate, by spattering.

10 The invention has been developed primarily for use in relation to the production of fibre reinforced cement (FRC) sheet from cementitious slurry, and will be described primarily with reference to that application. However, it will be appreciated that the invention is not limited to this particular field of use.

**BACKGROUND OF THE INVENTION**

15 The following discussion of the prior art is intended to present the invention in an appropriate technical context and allow the significance of it to be properly appreciated. Unless clearly indicated to the contrary, however, reference to any prior art in this specification should not be construed as an admission that such art is widely known or forms part of common general knowledge in the field.

20 Various apparatus for applying liquids to substrates are known. For example, one process makes use of a spray bar whereby a liquid coating, such as a paint or primer, is squirted and atomised through spaced apart nozzles, so as to coat the substrate which typically passes progressively beneath the spray bar on a conveyor. One problem with devices of this type is that the relatively fine nozzles required to  
25 achieve the degree of atomisation necessary for uniform coating are readily clogged,

- 2 -

particularly in the case of slurries containing a solid component in suspension. This results in inconsistent application, and requires frequent cleaning which is time consuming, costly and disruptive to the production process. Atomisation is also problematic in the case of more viscous liquids and slurries.

5           Another known device is a curtain coater, which makes use of a sheet or curtain of flexible fabric material which drapes over the moving substrate and applies a coating by means of a direct wiping action. However, curtain coaters are prone to inconsistent application, are not well suited for use with slurries, are limited in terms of the speed at which they can operate effectively in a production environment, and  
10 are not well adapted to applying relatively thick coatings.

          Another known form of applicator is usually referred to as a flood coater, which essentially operates by forming a pool of liquid on the substrate, and spreading the pool over the surface with air jets. Again, however, there are limitations with this technique in terms of the uniformity of application, the viscosity of the liquid or slurry  
15 that can be used, and the thickness of the layer or coating that can be applied.

          Generally, therefore, these known forms of apparatus are subject to a variety of limitations including susceptibility to clogging, inconsistent application, limitations in speed, limitations in the width of sheet material that the coating can be applied to, limitations in the consistency of the liquid or slurry that can be applied, or some  
20 combination of one or more of these shortcomings. They are also typically adapted to apply relatively thin outer surface coatings, as distinct from intermediate layers of substantial thickness as part of a laminated sheet. These limitations render such prior art devices generally unsuitable for use in the manufacture of sheet materials, and particularly FRC sheets, of substantial size and at relatively high speed.

25           Another known form of apparatus is a spatter coater, which makes use of a rotating roller incorporating a radial array of flexible filaments or bristles to spatter a coating onto a substrate. Spatter coaters are used, for example, to apply surface coatings to clay or masonry tiles, on a production line. Spatter coaters are able to some extent to overcome some of the deficiencies of the other known forms of coating  
30 apparatus, especially in terms of clogging. However, in the context of the production of sheet material, known spatter coaters are also subject to inherent limitations.

- 3 -

In particular, known spatter coaters are not able accurately to stop and restart the application process on an intermittent basis, in order to permit precisely controlled coating or laminating. This is especially so with the types of slurries typically used in the production of FRC sheet, because of the relatively runny consistency required to ensure "self-levelling", and the consequential tendency for excess slurry to drip onto the substrate, even if the slurry supply is shut off or the spattering roller is temporarily stopped.

This precise control over intermittent stopping and starting of the application process is particularly important in a high speed production environment where different batches of sheets, having different layers, thicknesses or properties, may be required to run back to back through the coating apparatus and inaccurate transitional control can result in patchy application, or the coating for one batch running over into the following batch of product.

A further difficulty arises due to the fact that, in the manufacture of FRC sheet or other products using cementitious slurries, it is desirable not to stop the supply of slurry to the apparatus itself, as this can result in the stagnation or accumulation of slurry in the apparatus or in upstream parts of the process. This, in turn, can result in overflows, changes in slurry consistency or concentration, settling or sedimentation, or undesirable variations in other process parameters.

Known spattering apparatus do not provide for the precise interruption of the slurry application process, and also do not allow for interruption without stopping the supply of slurry to the apparatus. They are therefore not effective in enabling an accurately controlled intermittent application process, especially in a high speed production environment for sheet materials.

It is an object of the present invention to overcome or ameliorate one or more of the disadvantages of the prior art, or at least to provide a useful alternative.

#### **SUMMARY OF THE INVENTION**

Accordingly, the invention provides an apparatus for applying a slurry to a substrate, the apparatus including:

a delivery surface disposed to support a layer of slurry;

- 4 -

spattering means adapted to be positioned closely adjacent the delivery surface and being movable so as to spatter the slurry from the delivery surface onto the substrate; and

regulation means for selectively varying or interrupting the flow of slurry  
5 from the delivery surface onto the substrate.

The terms "spatter", "spattering" and the like as used herein, are intended to encompass any application technique whereby the slurry is deposited onto a surface or substrate in droplet, globule, particulate or atomised form, whether produced by brushing, flicking, rotating, spraying, agitating, atomising or other dispersion means,  
10 and whether propelled by mechanical, electrostatic, hydrostatic, hydrodynamic, gravitational or other means.

Unless the context clearly requires otherwise, throughout the description and the claims, the words 'comprise', 'comprising', and the like are to be construed in an inclusive sense as opposed to an exclusive or exhaustive sense; that is to say, in the  
15 sense of "including, but not limited to".

Preferably, the apparatus includes a reservoir to contain slurry upstream of the regulation means. Preferably, the reservoir includes an inlet to direct slurry from a supply source and an outlet associated with the regulation means.

The regulation means preferably include a pair of barrier elements selectively  
20 movable to define an intermediate clearance space of variable effective cross-sectional flow area, thereby to permit selective regulation of the flow rate of slurry from the reservoir, between the barrier elements, through the outlet, to the delivery surface. Preferably, the barrier elements are selectively adapted, in a closed configuration, to shut off flow between the reservoir and the delivery surface.

25 Preferably, one of the barrier elements comprises a first cylindrical roller rotatable about a first axis. The other of the barrier elements is preferably a second cylindrical roller rotatable about a second axis, parallel to the first. The rollers are preferably configured to rotate in opposite directions.

The first roller preferably takes the form of a delivery drum, the outer surface  
30 of which constitutes the delivery surface. The second roller preferably takes the form of a metering roller selectively movable toward, and away from, the delivery drum.

- 5 -

The apparatus preferably includes a main frame supporting the delivery drum, and a first sub-frame on which the metering roller is mounted, the first sub-frame being rotatable about a third axis parallel to, and spaced from, the second axis, thereby adjustably to displace the metering roller towards, and away from, the delivery drum while maintaining a parallel orientation between them.

In one preferred embodiment, the apparatus includes first hydraulic or pneumatic actuation means extending between the main frame and the first sub-frame for adjustably moving the metering roller and the delivery drum toward or away from each other.

Preferably, the spattering means include a plurality of resiliently flexible elongate spattering elements in the form of bristles, extending radially outwardly from a cylindrical body rotatable about a fourth parallel axis. The body and spattering elements together preferably form a spattering roller.

The apparatus preferably further includes a second sub-frame on which the spattering roller is mounted, the second sub-frame being rotatable about a fifth axis substantially parallel to, and spaced apart from, the fourth axis. A second actuator preferably extends between the main frame and the second sub-frame to effect independently adjustable displacement of the spattering roller towards, and away from, the delivery drum, so as to permit selective variation or interruption of the spattering process, as part of the regulation means.

Preferably, the apparatus further includes a tank for containing a supply of the slurry and a delivery conduit for delivering the slurry from the tank to the reservoir through the inlet.

In one embodiment, the reservoir is defined by a tank positioned immediately above the delivery and metering rollers. In an alternative embodiment, the reservoir is simply a containment region defined between adjacent rollers, preferably the delivery roller and an abutting idler roller, with the metering roller being positioned above the delivery roller.

In a preferred embodiment, the slurry is a cementitious slurry and more preferably, is formed from a mixture of silica, cement, water and optionally other additives.

- 6 -

The apparatus is particularly suitable for applying aesthetic or functional coating layer to an existing substrate. In one embodiment, the slurry is a self levelling dewaterable cementitious slurry with a solids content of between 50% and around 90%. The slurry preferably includes a dewatering aid in a sufficient quantity to permit  
5 dewatering of the slurry, preferably through the substrate with or without vacuum assistance.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

Preferred embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawing in which:

10 Figure 1 is a perspective view of an apparatus in accordance with the invention;

Figure 2 is a diagrammatic side elevation of the apparatus of Figure 1;

Figure 3 is a schematic side elevation of the apparatus of Figure 1; and

15 Figure 4 is a schematic, side elevation showing an alternative embodiment of the invention.

- 7 -

**PREFERRED EMBODIMENTS OF THE INVENTION**

Referring initially to Figures 1 to 3, the invention provides an apparatus 1 for applying a cementitious slurry to a substrate 2 in the form of a laminated sheet material in the process of being manufactured. In broad terms, the apparatus 1 includes an elongate reservoir 3 for containing the slurry, and a delivery drum 4 having an outer delivery surface 5 for supporting an adherent layer of the slurry from the reservoir by surface tension. Regulating means 6 including a cylindrical metering roller 7 are adapted to selectively regulate the flow rate of slurry from the reservoir to the delivery surface, and a spattering roller 8 is disposed to spatter the slurry from the delivery surface onto the substrate. These features of the invention are described in more detail below.

At the top of the reservoir 3, there are a number of inlets 9 to direct slurry from a supply source in the form of a five hundred litre main slurry holding tank 10 (see Figure 3) positioned below the level of the apparatus. The slurry is delivered by a pump (not shown) to the reservoir from the main tank via a manifold 11. The manifold includes a header pipe 12 in fluid communication with the main tank 10, and a number of parallel delivery pipes 13 leading from the header pipe, through the inlets 9, into the reservoir to deliver the slurry as indicated by arrows A in Figure 3. An overflow pipe 14 is connected between the reservoir and the main tank for recirculating slurry above a predetermined level in the reservoir back to the tank, as indicated by arrow B, to prevent overflow.

The delivery drum 4 is essentially a cylindrical roller mounted for rotation in a direction indicated by arrow C, about a first axis 15 on a main frame 16. The drum 4 is disposed below the reservoir and is parallel to but longitudinally offset relative to the centre line of the reservoir. The drum is disposed under an outlet 17 of the reservoir, and is therefore in the path of slurry flowing downwardly from the reservoir, as indicated by arrow D. Thus, slurry from the reservoir flows directly onto the delivery surface 5.

The delivery drum 4 operates in conjunction with the metering roller 7 to define the outlet and to form part of the regulation means 6 referred to above. The metering roller 7 is mounted on a first sub-frame 18 for rotation, in a direction indicated by arrow E, about a second axis 19 which is parallel to the first axis 15. The

- 8 -

sub-frame 18, in turn, is mounted on the main frame 16 for rotation about a third axis 20 which is parallel to the second axis 19. The delivery drum and the metering roller are rotationally driven in opposite directions by a motor, via a chain drive assembly (not shown). Both the delivery drum and the metering roller are plated with chrome to provide the desired surface hardness. In alternative embodiments, however, the drum and roller may be additionally or alternatively coated with polyurethane, carbide, or other suitable surface coatings, treatments or finishes.

An actuation mechanism including a ram 21 is provided for adjustably rotating the first sub-frame 18 so that the metering roller 7 moves towards, or away from, the delivery drum, as indicated by arrow F. It will therefore be appreciated that the delivery drum and the metering roller serve as a pair of barrier elements, adjustably defining an intermediate clearance space 22 for channelling or blocking the flow of slurry from the reservoir to the surface of the delivery drum. Thus, movement of the metering roller towards, or away from, the delivery drum varies the effective cross-sectional area of the clearance space 22, and this movement therefore regulates the flow rate of the slurry onto the delivery surface. In the embodiment shown, the ram 21 includes a screw and is actuated by rotation. In other embodiments (not shown), the ram may be pneumatic or hydraulic.

The spattering roller 8 includes a cylindrical body 23 and a plurality of resiliently flexible elongate spattering elements in the form of bristles 24 which extend radially outwardly from the body. The spattering roller is mounted on a second sub-frame 25 for rotation about a fourth axis 26, parallel to the other axes. The second sub-frame 25, in turn, is mounted on the main frame 16 for rotation about a fifth parallel axis 27. A second ram 28, is provided for rotating the second sub-frame 25 about its axis 27, and hence for adjustably moving the spattering roller 8 towards, or away from, the delivery drum 4 as indicated by arrow G. The spattering roller 8 is rotationally driven by a motor via a V-belt and pulley assembly (not shown).

An overflow sump 29 is provided at the bottom of the apparatus and is positioned to catch overflow slurry from the reservoir, which falls from or between the metering roller and delivery drum, without being picked up by the spattering roller 8.

In use, the apparatus is disposed across a conveyer (not shown) which forms part of a production line for sheeting to be formed from, or incorporate, a layer of

- 9 -

material formed from the slurry. The sheet may or may not be fibrous and laminated. However, it is envisaged that the invention will ideally be used in relation to the manufacture of laminated fibre reinforced cement (FRC) sheet and in that context, may be incorporated into the known "Hatschek" process.

5           As the sheet passes beneath on the conveyer, the apparatus is activated and slurry is permitted to flow downwardly from the reservoir onto the rotating delivery drum 4. The spattering roller 8 also rotates whereby the bristles 24 are dragged over the delivery drum, to collect slurry from the layer formed on the delivery surface of the drum. When the bristles move clear of the delivery drum, they flick the slurry and  
10   spatter it onto the sheet below, to apply a relatively uniform layer of slurry.

          The distance between the metering roller and the counter-rotating delivery drum determines the effective cross-sectional flow area of the intermediate clearance space 22 and hence the flow rate of the slurry onto the drum. This, in turn, determines the thickness of the layer of slurry formed on the delivery surface which also affects  
15   the rate of spattering of the slurry by the spattering roller. This thickness can be adjusted as desired by means of the ram 21 to be appropriate for the particular formulation of slurry being used, to achieve the desired thickness of the spattered layer.

          In addition to adjusting the cross-sectional area of the clearance space 22, the  
20   spattering characteristics can also be varied by moving the spattering roller 8 towards, or away from, the delivery drum using the second ram 28. This varies the extent to which the bristles penetrate the slurry layer on the delivery surface, pressure of the bristles 24 on the delivery surface, and the extent of resilient deformation of the bristles to provide an added dimension of control. Further adjustment and control can  
25   be achieved by varying the speed of the spattering roller, both in absolute terms and relative to the delivery roller. By altering these various operational parameters which also broadly constitute aspects of the regulation means, different thicknesses, up to around 10 mm or more, can be achieved in single, intermediate or surface layers. Different surface finishes such as orange peel, stucco and the like can also be  
30   achieved.

          The second sub-frame 25 is capable of rotating sufficiently about its axis 27 to allow the spattering roller to move well clear of the delivery drum. This enables

- 10 -

accurate stopping and starting of the application process as described in more detail below, as well as facilitating cleaning and maintenance of the spattering roller and the drum.

It will be appreciated that some of the slurry flowing from the reservoir lands  
5 on, and is carried round by, the metering roller 7 rather than the delivery drum. This slurry, as well as other slurry passing through the outlet which is not picked up by the spattering roller, falls from the metering roller as overflow into the sump 29, from where it is fed, by gravity, back to the supply tank 10.

One embodiment of the apparatus is adapted to be used on a production line  
10 on which sheets having different characteristics and constituent layers are produced in quick succession. Consequently, it is necessary to be able to pause and restart the spattering process, and adjust the slurry flow rate, rapidly and accurately to prevent a carry-over of the spattering conditions in respect of one type of sheet to the type of sheet passing along the production line.

To this end, adjustment of the flow rate is achieved by moving the metering  
15 roller relative to the delivery drum, so as to adjust the intermediate clearance space 22. To temporarily stop the spattering process, the spattering roller is intermittently moved away from the delivery roller. In this way, the spattering roller also forms part of the flow regulation means. Additionally or alternatively, the metering roller may  
20 simply be moved until it abuts the delivery drum directly, so as to completely close the clearance space 22, thereby cutting off the supply of slurry to the deliver surface, through the associated outlet.

During this process, it is desirable not to stop or reduce the rate of delivery of slurry from the main supply tank 10 to the reservoir 3, as this may have  
25 disadvantageous consequences including overflows, changes in slurry consistency or concentration, settling or sedimentation, upsetting of other process parameters, or clogging of piping which in turn may interrupt the production process, and necessitate labour-intensive maintenance and cleaning operations. Accordingly, when the spattering process is paused, resulting in the flow rate of slurry from the reservoir  
30 being reduced or stopping completely, the level of slurry in the reservoir may increase. Once it reaches the level of the overflow pipe 14, the overflow slurry is returned through this pipe back to the main tank. Thus, in pause mode, the slurry

- 11 -

continues to circulate between the tank and the reservoir, to prevent settling, clogging or overflowing until delivery resumes.

Figure 4 is a schematic view showing a further embodiment of the invention, wherein corresponding features are denoted by corresponding reference numerals. In this case, a separate tank for the reservoir is not used. Rather, the reservoir simply takes the form of an open topped containment region 30 defined between the delivery roller 4 and an adjacent idler roller 32 positioned in rolling contact, and in side by side relationship, with respect to the delivery roller. The idler roller is coated with polyurethane and is not driven. The height and diameter of the idler roller are configured such that the slurry in the containment region flows naturally into the clearance space 22 between the delivery roller 4 and the metering roller 7, which in this embodiment is positioned immediately above the delivery roller. An additional collection tray 34 is provided to collect any slurry dripping from the idler roller, and feed it back to the main tank 10 via the overflow conduit 14 for recirculation. In most other respects, this embodiment functions in essentially the same way as that previously described.

The apparatus may be positioned at any desired point along the process line, and may be selectively operated on an intermittent basis at any desired time in the process, in order to position the spattered layer or layers appropriately. For example, the spattered layer may be initially applied to the belt as a first layer of film, so as to form what will ultimately be an outer layer of the finished sheet. This may be done, for example, in a case where the outer spattered layer will comprise a softer formulation to facilitate sanding and finishing, a coloured formulation for branding or to obviate the need for painting, or a textured layer to achieve a desired aesthetic effect. The same considerations might apply in the case where the spattered layer is the final layer in which case, again, it will form an outer face of the finished sheet. Alternatively, the spattered slurry may be applied at an intermediate stage to form an internal layer. This may be done, for example, in the case of a fire retardant layer, a moisture barrier layer, or a layer added for structural purposes, where surface finish or aesthetic considerations are not directly relevant. It should also be appreciated that the entire sheet may be formed by spattering, either as a single uniform layer, or from multiple spattered layers of the same or different composition. In this context, it will

- 12 -

further be appreciated that a series of the spattering devices may be positioned in sequence along a process line using either the same or different slurry formulations. It should also be understood that the sheet material may include layers formed previously or simultaneously by other processes. Furthermore, the apparatus may be  
5 used to apply a paint primer, render, sealant or other surface coating, whether cementitious in composition or otherwise.

The invention provides an effective and efficient method and apparatus for producing sheet material. In its preferred application in the manufacture of FRC, it provides a means of accurately producing a laminated sheet material which can be  
10 readily tailored and optimised in order to achieve a wide variety of performance and aesthetic characteristics. The apparatus also allows the application characteristics to be readily altered, providing a considerable degree of flexibility to produce a range of different products, including laminated products, on an effectively continuous basis, with minimum set up time between runs. In all these respects, the invention  
15 represents a practical and commercially significant improvement over the prior art.

Although the invention has been described with reference to specific embodiments it will be appreciated by those skilled in the art that it may be embodied in many other forms. In particular, it will be appreciated that the method and apparatus of the present invention may be adapted for use in conjunction with the  
20 composite product, additive for dewaterable slurry, and coatings for building products as described in the various priority documents.

- 13 -

## CLAIMS

1. An apparatus for applying a slurry to a substrate, the apparatus including:  
a delivery surface disposed to support a layer of slurry;  
spattering means adapted to be positioned closely adjacent the delivery  
5 surface and being movable so as to spatter the slurry from the delivery surface onto  
the substrate; and  
regulation means for selectively varying or interrupting the flow of slurry  
from the delivery surface onto the substrate.
2. An apparatus according to claim 1, further including a reservoir to contain  
10 slurry upstream of the regulation means.
3. An apparatus according to claim 2, wherein the reservoir includes an inlet to  
direct slurry from a supply source and an outlet associated with the regulation means.
4. An apparatus according to any one of the preceding claims, wherein the  
regulation means include a pair of barrier elements selectively movable to define an  
15 intermediate clearance space of variable effective cross-sectional flow area, thereby to  
permit selective regulation of the flow rate of slurry from the reservoir, between the  
barrier elements, through the outlet, to the delivery surface.
5. An apparatus according to claim 4, wherein the barrier elements are  
selectively adapted, in a closed configuration, to shut off flow between the reservoir  
20 and the delivery surface.
6. An apparatus according to claim 4 or claim 5, wherein one of the barrier  
elements comprises a first cylindrical roller rotatable about a first axis.
7. An apparatus according to claim 6, wherein another of the barrier elements is  
a second cylindrical roller rotatable about a second axis, parallel to the first.
- 25 8. An apparatus according to claim 7, wherein the first and second rollers are  
configured to rotate in opposite directions.
9. An apparatus according to claim 8, wherein the first roller takes the form of a  
delivery drum, an outer surface of which constitutes the delivery surface, and the  
second roller takes the form of a metering roller selectively movable toward, and away  
30 from, the delivery drum.
10. An apparatus according to claim 9, further including a main frame supporting  
the delivery drum, and a first sub-frame on which the metering roller is mounted, the

- 14 -

first sub-frame being rotatable about a third axis parallel to and spaced apart from the second axis, thereby adjustably to displace the metering roller towards, and away from, the delivery drum while maintaining a parallel orientation therebetween.

11. An apparatus according to claim 10, further including first actuation means  
5 extending effectively between the main frame and the first sub-frame for adjustably moving the metering roller and the delivery drum toward or away from each other.

12. An apparatus according to claim 11, wherein the first actuation means include a hydraulic or pneumatic cylinder.

13. An apparatus according to any one of claims 1 to 12, wherein the spattering  
10 means include a plurality of resiliently flexible elongate spattering elements in the form of bristles, extending radially outwardly from a cylindrical body rotatable about a fourth axis.

14. An apparatus according to claim 13, when dependent upon claim 10, wherein the fourth axis is generally parallel to the first, second and third axes.

15 15. An apparatus according to claim 13 or claim 14, wherein the body and the spattering elements together form a spattering roller.

16. An apparatus according to claim 15, further including a second sub-frame on which the spattering roller is mounted, the second sub-frame being rotatable about a fifth axis substantially parallel to, and spaced apart from, the fourth axis.

20 17. An apparatus according to claim 16, wherein second actuation means extend effectively between the main frame and the second sub-frame to effect independently adjustable displacement of the spattering roller towards, and away from, the delivery drum, so as to permit selective variation or interruption of the spattering process, as part of the regulation means.


25 18. An apparatus according to claim 17, wherein the second actuation means include a hydraulic or pneumatic cylinder.

19. An apparatus according to any one of claims 9 to 18, further including a tank for containing a supply of the slurry and a delivery conduit for delivering the slurry from the tank to the reservoir through the inlet.


30 20. An apparatus according to claim 19, wherein the reservoir is defined by a tank positioned immediately above the delivery drum and the metering roller.

- 15 -

21. An apparatus according to claim 19, wherein the reservoir comprises a containment region defined between adjacent rollers.
22. An apparatus according to claim 21, wherein the containment region is defined between the delivery drum and an abutting idler roller, with the metering  
5 roller being positioned above the delivery roller.
23. An apparatus according to any one of the preceding claims, being adapted for use with a cementitious slurry formed from a mixture of silica, cement, water and optionally other additives.
24. An apparatus according to claim 23, wherein the cementitious slurry is a self  
10 levelling dewaterable slurry with a solids content of between 50% and around 90%.
25. An apparatus according to claim 24, wherein the slurry includes a dewatering aid in sufficient quantity to permit dewatering of the slurry, through an underlying substrate.

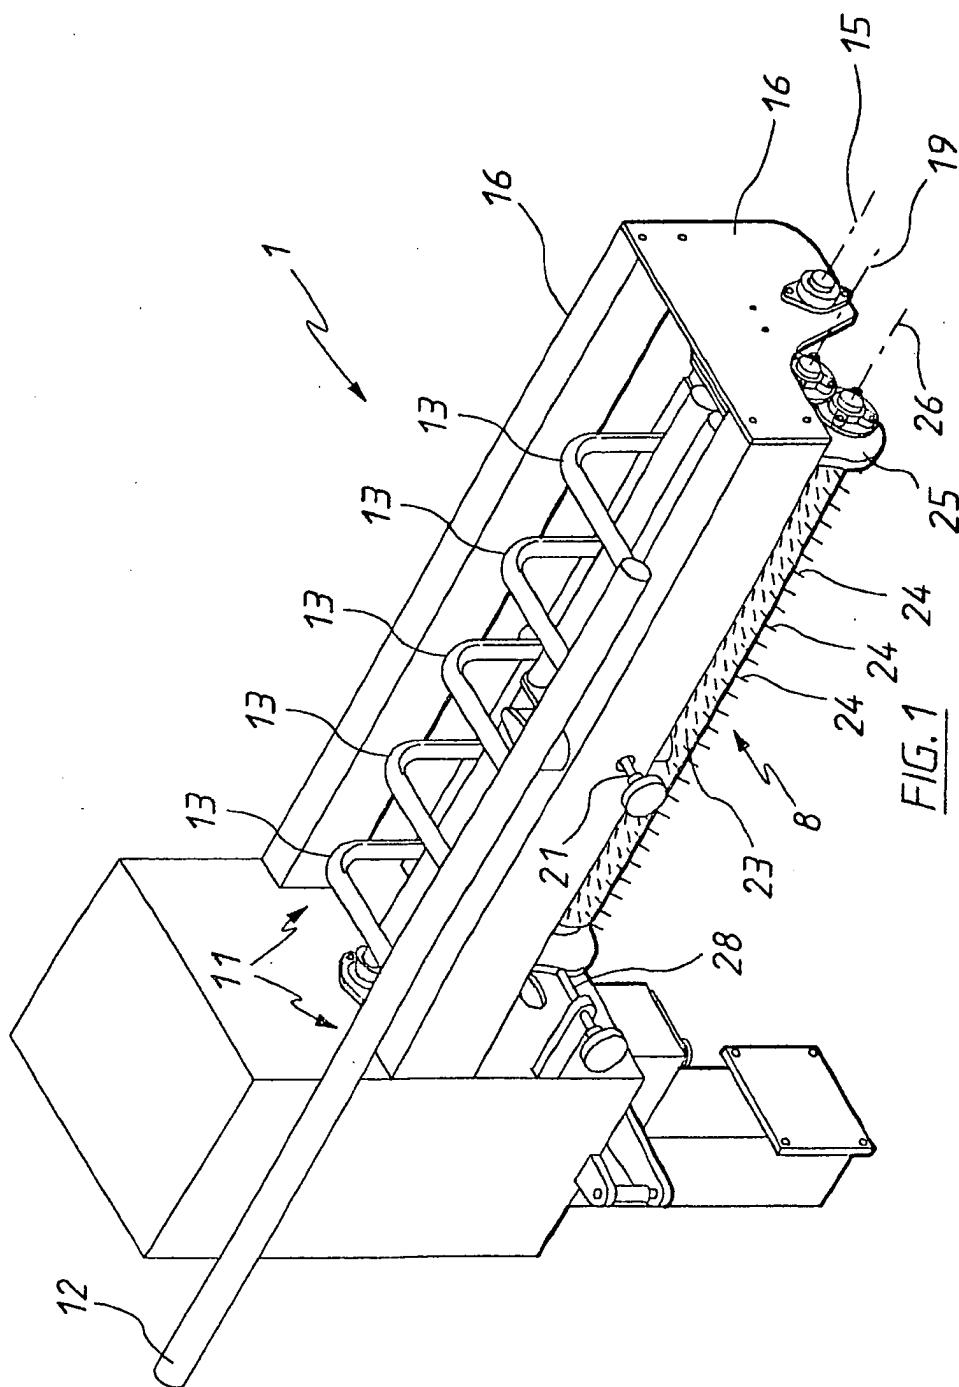

2/4

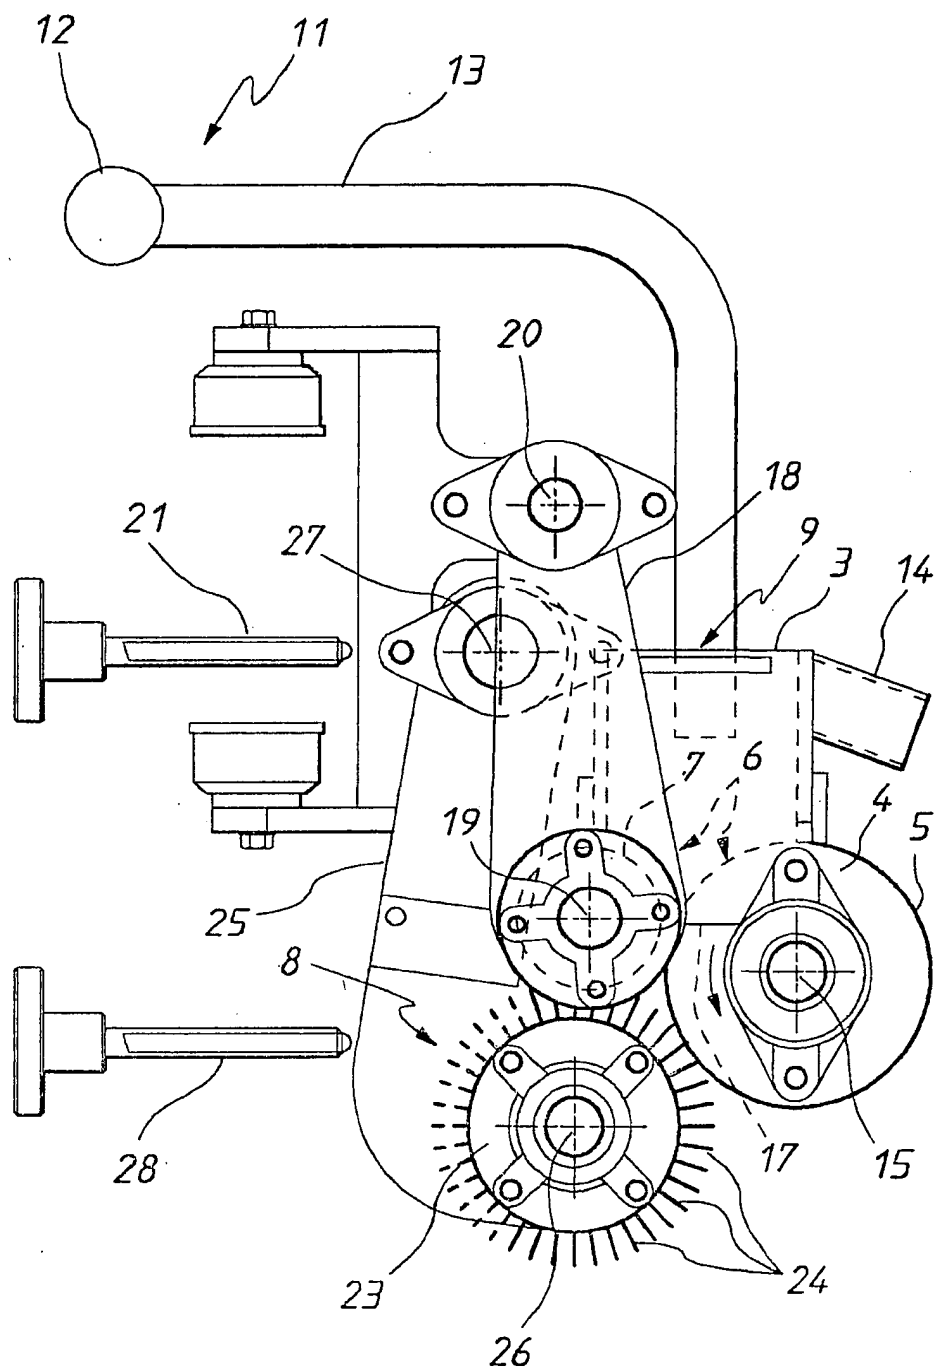FIG. 2

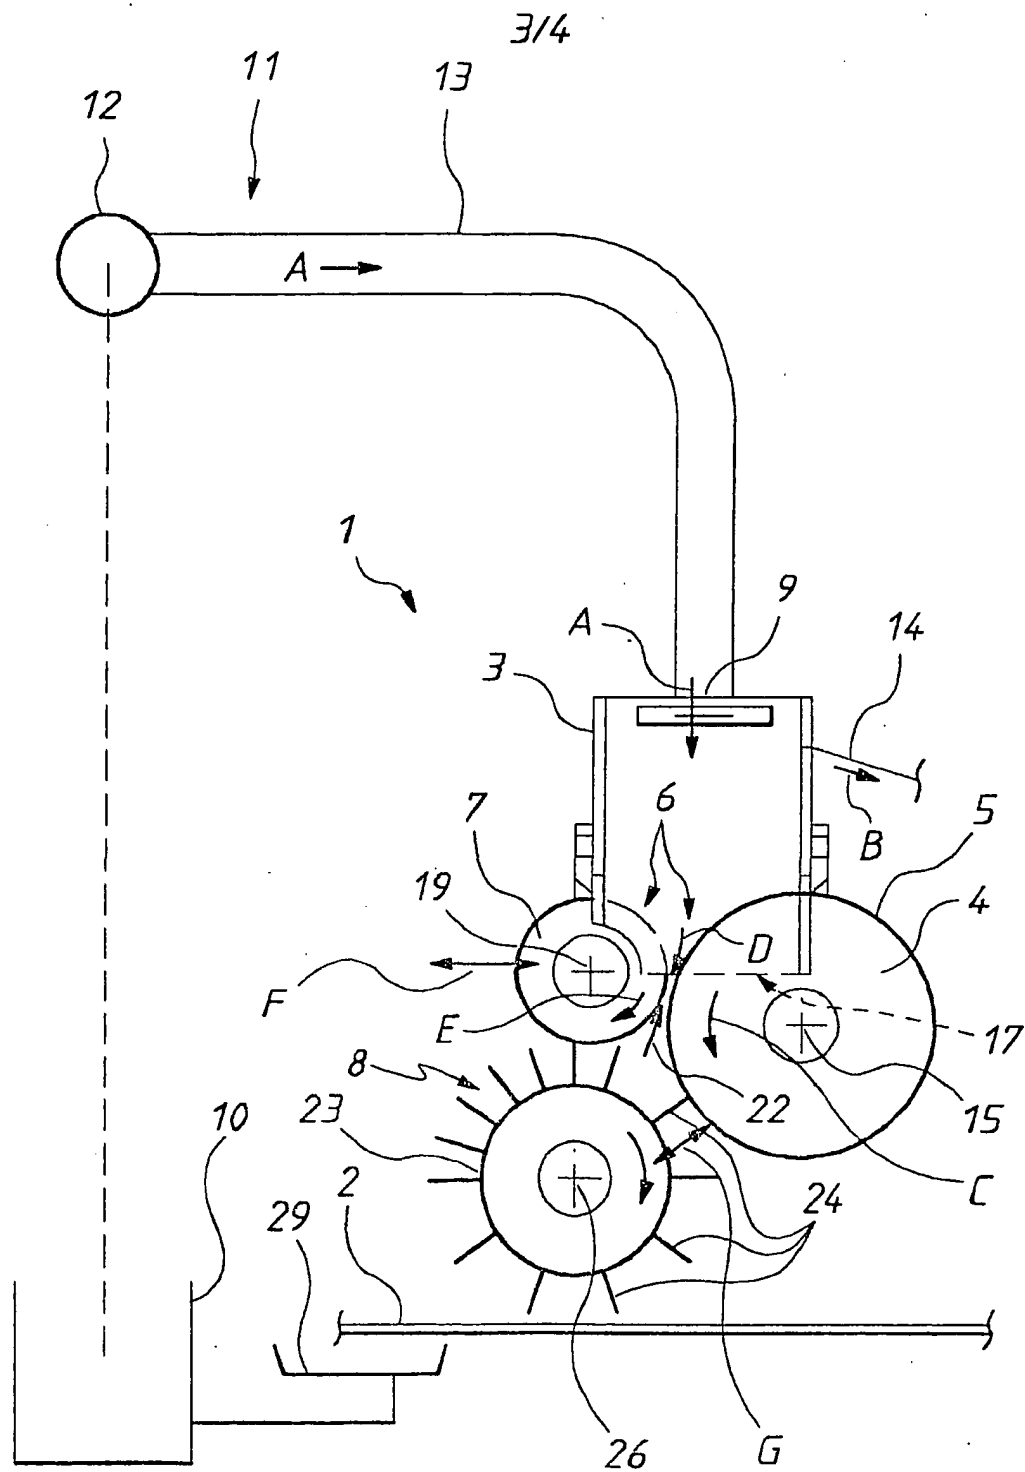
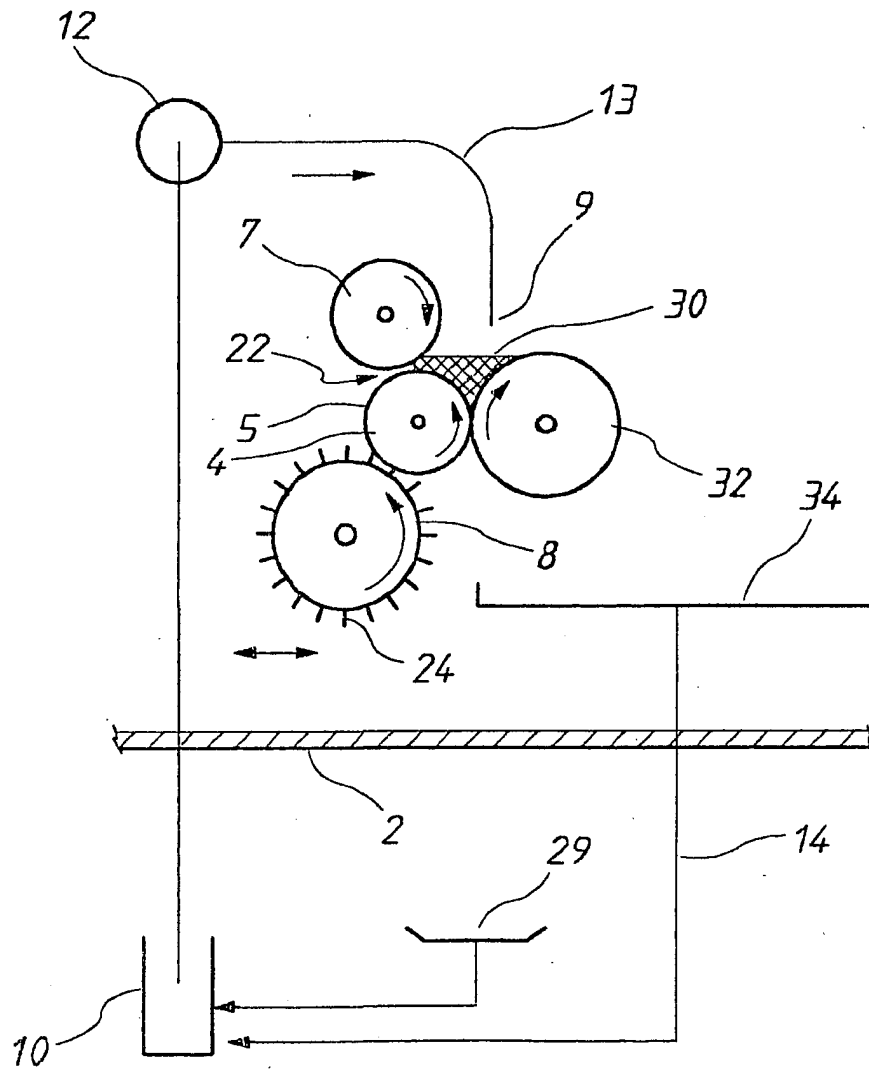


FIG. 3

4/4

FIG.4

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU02/00226

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>												
Int. Cl. <sup>7</sup> : B05C 9/02												
According to International Patent Classification (IPC) or to both national classification and IPC												
<b>B. FIELDS SEARCHED</b>												
Minimum documentation searched (classification system followed by classification symbols) REFER TO THE ELECTRONIC DATABASE CONSULTED BELOW												
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched												
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DWPI IPC B05C 5/-, 9/-, 11/-, B05D 1/- & keywords: slurry, spatter and similar terms												
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>												
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.										
X	Derwent Abstract Accession No. 97-443025/41, Class P42, JP 09-201561 A (KUBOTA CORP) 5 August 1997 Abstract	1-25										
X	Derwent Abstract Accession No. 85-213103/35, Class P42, P64 JP 60-135211 A (MATSUSHITA ELEC WORKS) 18 July 1985 Abstract	1-25										
X	US 4204644 A (KOZUKA) 27 May 1980 Whole document	1-25										
<input type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex												
<p>* Special categories of cited documents:</p> <table border="0"> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E" earlier application or patent but published on or after the international filing date</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td>"&amp;" document member of the same patent family</td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family	"P" document published prior to the international filing date but later than the priority date claimed	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention											
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone											
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art											
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family											
"P" document published prior to the international filing date but later than the priority date claimed												
Date of the actual completion of the international search 18 April 2002		Date of mailing of the international search report										
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustalia.gov.au Facsimile No. (02) 6285 3929.		Authorized officer  JAGDISH WABLE Telephone No : (02) 6283 2638										

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
**PCT/AU02/00226**

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
JP	9201561	NONE					
JP	60135211	NONE					
US	4204644	AU	29642/77	BE	860799	DE	2751661
		DK	5131/77	GB	1555266	JP	53063419
		NL	7712642	SE	7712950		
END OF ANNEX							